


Excel Solid Cat7A Cable S/FTP B2ca LS0H 500 m Reel Yellow

Item Code: 190-910

excel
without compromise.

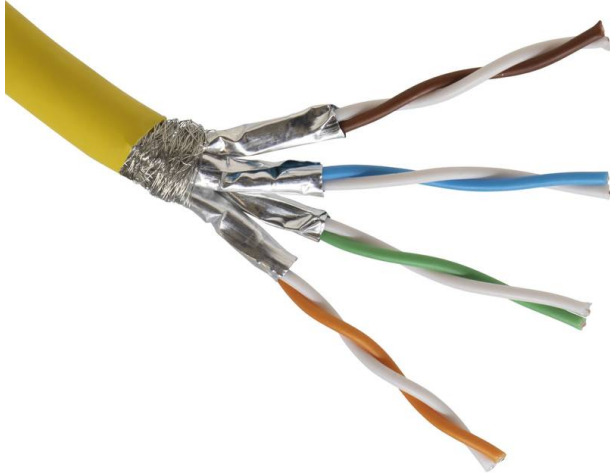

✘ Category 7A Performance to 1000 MHz

✘ Individual foil pairs with overall braid screen

✘ High performance design

✘ 25 year system warranty

✘ Sequential metre markings

✘ Euroclass -B2ca-s1a-d1-a1

Product Overview

The Excel Category 7A Screened S/FTP LS0H Cable is designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards. This delivers Class FA link and channel performance supporting all applications detailed and proposed within the standards. This superior performance cable is ETL Component Verified.

Each cable consists of 4 pairs individually wrapped in a covering of high quality, strong, aluminium/polyester foil tape providing an individual screen for each pair. These sub units are then cabled together, with the pairs set to different lay lengths to ensure optimum performance, an overall braid screen is applied to provide further immunity to outside noise and to mitigate any risk of alien cross talk.


The print legend on the cable now includes information regarding the DOP number, Test and Classification of the cable for traceability.

Product Specifications

| Feature | Values |
|-------------------------------|-------------------|
| Conductor surface | Bare |
| AWG size | 23 |
| Conductor category | Class 1 = solid |
| Total number of cores | 8 |
| Stranding element | Pairs |
| Specification core insulation | Polyethylene (PE) |
| Core identification | Colour |

| | |
|---|---------------------------------|
| Overall screening | Braiding |
| Conductor screening | Foil |
| Outer sheath material | Copolymer, thermoplastic (LS0H) |
| Outer sheath colour | Yellow |
| Flame retardant according to IEC 60332-1-2 | yes |
| Reaction-to-fire class according to EN 13501-6 | B2ca |
| Smoke development class according to EN 13501-6 | s1a |
| Euro class flaming droplets/particles according to EN 13501-6 | d1 |
| Euro class acidity according to EN 13501-6 | a1 |
| Outer diameter approx. | 7.8 mm |
| Installation Temperature Range | 0...60 °C |
| Operating Temperature Range | -20...60 °C |
| Category | 7A (IEC) |
| NVP value | 76 % |

Cross-section diagram

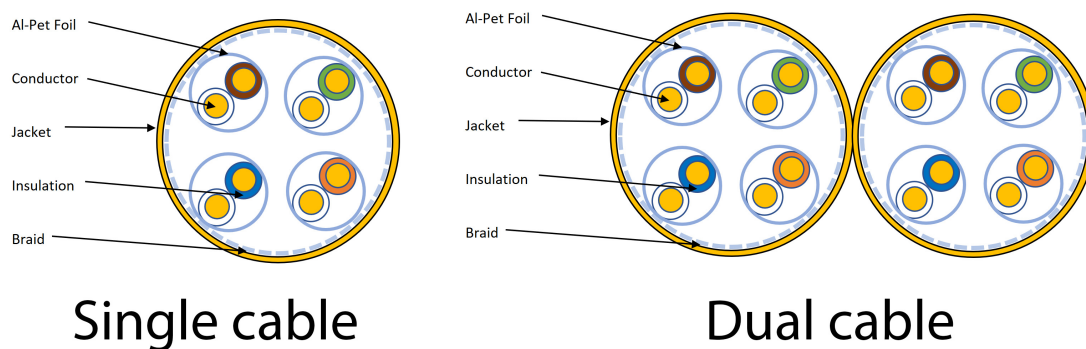

Single cable

Dual cable

Cable specifications

| Features | Values |
|-------------------------|--------------|
| Dielectric strength | 2.5kV for 2s |
| Maximum pulling load | 60N/6.1KgF |
| MBR during installation | 8x cable OD |
| MBR installed | 4x cable OD |

Standards

| Applicable standard | Subject |
|-------------------------------|--|
| ISO/IEC 11801-1:2017 | Information technology - Generic cabling for customer premises: Part 1 General Requirements |
| IEC 61156-5:2020 | Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification |
| EN 50173-1:2018 | Information technology. Generic cabling systems - General requirements |
| EN 50173-2:2018 | Information technology. Generic cabling systems - Office premises |
| BS EN 50288-3-1:2013 | Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz |
| EN 50399:2011+A1:2016 | Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results |
| IEC 60332-1-2:2004 + A12:2020 | Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame |
| ANSI/TIA 568-D:2015 | Balanced Twisted-Pair Telecommunications Cabling and Components Standards |
| IEC 60754-2:2014 | Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity |
| IEC 61034-2:2005+A2:2020 | Measurement of smoke density of cables burning under defined conditions - Part 2: Test procedure and requirements |
| EN 50575:2014 + A1:2016 | Power, control and communication cables — Cables for |

Excel Solid Cat7A Cable S/FTP B2ca LS0H 500 m Reel Yellow

Item Code: 190-910



general applications in construction works subject to reaction to fire requirements

RoHS-II/-III (2011/65/EU & 2015/863): 2023

Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).

WFD: 2023

Compliant to Waste Framework Directive

SCIP: 2023

Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)

POPs (EU) No 2019/1021

EU Regulation for the restriction of Persistent Organic Pollutants.

Part Number Table

| Part Number | Description |
|---------------|---|
| 100-910 | Excel Solid Cat7A Cable S/FTP Dca LS0H 500 m Reel Yellow |
| 100-910-1000 | Excel Solid Cat7A Cable S/FTP Dca LS0H 1000 m Reel Yellow |
| 100-910-GRY | Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Grey |
| 100-910-VT | Excel Category 7A Cable S/FTP Dca LS0H 500m Reel - Violet |
| 100-911 | Excel Dual Cat7A Cable S/FTP Dca LS0H 500 m Reel Yellow |
| 100-912 | Excel Category 7A+ Cable S/FTP Eca LS0H 500m Reel - Yellow |
| 190-910 | Excel Solid Cat7A Cable S/FTP B2ca LS0H 500 m Reel Yellow |
| 190-910-1000M | Excel Solid Cat7A Cable S/FTP B2ca LS0H 1000 m Reel Yellow |
| 190-910-VT | Excel Solid Cat7A Cable S/FTP B2ca LS0H 500 m Reel Violet |
| 190-912 | Excel Solid Cat7A+ Cable S/FTP 22 AWG B2ca LS0H 500 m Reel Yellow |

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com



E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.